Product Manual

Barracuda 7200.12 Serial ATA

ST31000528AS
ST3750528AS
ST3500418AS
ST3500410AS
ST3320418AS
ST3250318AS
ST3160318AS

100529369
Rev. G
February 2010

Revision history

Revision	Date	Sheets affected or comments
Rev. A	08/15/08	Initial release.
Rev. B	02/12/09	fc, 1, 3-19, 22-25, 29-30 and 37.
Rev. C	04/03/09	11.
Rev. D	09/01/09	28.(add command ‘write uncorrectable - 45h’); 30.(words 75 & 81 code edits)
Rev. E	10/14/09	Updated Write DMA FUA Extended command on page 28.
Rev. F	11/18/09	Updated drive specifications on Tables 1 thru 3. Added “Warranty” specific section.
Rev. G	02/24/10	Updated non-operating vibration specifications throughout.

© 2008-2010 Seagate Technology LLC. All rights reserved. Printed in U.S.A.

Publication number: 100529369, Rev. G, February 2010

Seagate, Seagate Technology and the Wave logo are registered trademarks of Seagate Technology LLC in the United States and/or other countries. Barracuda, SeaTools and SeaTDD are either trademarks or registered trademarks of Seagate Technology LLC or one of its affiliated companies in the United States and/or other countries. All other trademarks or registered trademarks are the property of their respective owners.

When referring to drive capacity, one gigabyte, or GB, equals one billion bytes and one terabyte, or TB, equals one trillion bytes. Your computer's operating system may use a different standard of measurement and report a lower capacity. In addition, some of the listed capacity is used for formatting and other functions, and thus will not be available for data storage. Seagate reserves the right to change, without notice, product offerings or specifications.

Contents

1.0 Introduction . . . 1
1.1 About the Serial ATA interface . . . 2
2.0 Drive specifications . . . 3
2.1 Formatted capacity . . . 10
2.1.1 LBA mode . . . 10
2.2 Default logical geometry . . . 10
2.3 Recording and interface technology . . . 11
2.4 Physical characteristics . . . 11
2.5 Seek time . . . 12
2.6 Start/stop times . . . 12
2.7 Power specifications . . . 13
2.7.1 Power consumption . . . 13
2.7.2 Conducted noise . . . 14
2.7.3 Voltage tolerance . . . 14
2.7.4 Power-management modes . . . 14
2.8 Environmental specifications . . . 15
2.8.1 Ambient temperature . . . 15
2.8.2 Temperature gradient . . . 15
2.8.3 Humidity . . . 15
2.8.4 Altitude . . . 15
2.8.5 Shock . . . 16
2.8.6 Vibration . . . 16
2.9 Acoustics . . . 17
2.9.1 Test for Prominent Discrete Tones (PDTs) . . . 17
2.10 Electromagnetic immunity . . . 17
2.11 Warranty . . . 18
2.12 Agency certification . . . 18
2.12.1 Safety certification . . . 18
2.12.2 Electromagnetic compatibility . . . 18
2.12.3 FCC verification . . . 19
2.13 Environmental protection . . . 20
2.13.1 European Union Restriction of Hazardous Substances (RoHS) Directive . . . 20
2.13.2 China Restriction of Hazardous Substances (RoHS) Directive . . . 20
2.14 Corrosive environment . . . 20
3.0 Configuring and mounting the drive . . . 21
3.1 Handling and static-discharge precautions . . . 21
3.2 Configuring the drive . . . 22
3.3 Serial ATA cables and connectors . . . 22
3.4 Drive mounting . . . 23
4.0 Serial ATA (SATA) interface . . . 25
4.1 Hot-Plug compatibility . . . 25
4.2 Serial ATA device plug connector pin definitions . . . 26
4.3 Supported ATA commands . . . 27
4.3.1 Identify Device command . . . 29
4.3.2 Set Features command . . . 33
4.3.3 S.M.A.R.T. commands . . . 34
5.0 Seagate Technology support services . . . 35

List of Figures

Figure 1. Serial ATA connectors 22
Figure 2. Attaching SATA cabling 22
Figure 3. Mounting dimensions (1000 and 750GB models). 23
Figure 4. Mounting dimensions (500, 320, 250 and 160GB models). 24

1.0 Introduction

This manual describes the functional, mechanical and interface specifications for the following Seagate Barracuda® 7200.12 Serial ATA model drives:

ST31000528AS	ST3500418AS	ST3320418AS	ST3160318AS
ST3750528AS	ST3500410AS	ST3250318AS	

These drives provide the following key features:

- 7200 RPM spindle speed.
- High instantaneous (burst) data-transfer rates (up to 300MB per second).
- Perpendicular recording technology provides the drives with increased areal density.
- State-of-the-art cache and on-the-fly error-correction algorithms.
- Native Command Queueing with command ordering to increase performance in demanding applications.
- Full-track multiple-sector transfer capability without local processor intervention.
- Quiet operation.
- Compliant with RoHS requirements in China and Europe.
- SeaTools diagnostic software performs a drive self-test that eliminates unnecessary drive returns.
- Support for S.M.A.R.T. drive monitoring and reporting.
- Supports latching SATA cables and connectors.
- Worldwide Name (WWN) capability uniquely identifies the drive.

1.1 About the Serial ATA interface

The Serial ATA interface provides several advantages over the traditional (parallel) ATA interface. The primary advantages include:

- Easy installation and configuration with true plug-and-play connectivity. It is not necessary to set any jumpers or other configuration options.
- Thinner and more flexible cabling for improved enclosure airflow and ease of installation.
- Scalability to higher performance levels.

In addition, Serial ATA makes the transition from parallel ATA easy by providing legacy software support. Serial ATA was designed to allow you to install a Serial ATA host adapter and Serial ATA disk drive in your current system and expect all of your existing applications to work as normal.

The Serial ATA interface connects each disk drive in a point-to-point configuration with the Serial ATA host adapter. There is no master/slave relationship with Serial ATA devices like there is with parallel ATA. If two drives are attached on one Serial ATA host adapter, the host operating system views the two devices as if they were both “masters” on two separate ports. This essentially means both drives behave as if they are Device 0 (master) devices.

Note. The host adapter may, optionally, emulate a master/slave environment to host software where two devices on separate Serial ATA ports are represented to host software as a Device 0 (master) and Device 1 (slave) accessed at the same set of host bus addresses. A host adapter that emulates a master/slave environment manages two sets of shadow registers. This is not a typical Serial ATA environment.

The Serial ATA host adapter and drive share the function of emulating parallel ATA device behavior to provide backward compatibility with existing host systems and software. The Command and Control Block registers, PIO and DMA data transfers, resets, and interrupts are all emulated.

The Serial ATA host adapter contains a set of registers that shadow the contents of the traditional device registers, referred to as the Shadow Register Block. All Serial ATA devices behave like Device 0 devices. For additional information about how Serial ATA emulates parallel ATA, refer to the “Serial ATA International Organization: Serial ATA Revision 3.0”. The specification can be downloaded from www.sata-io.org.

2.0 Drive specifications

Unless otherwise noted, all specifications are measured under ambient conditions, at 25°C, and nominal power. For convenience, the phrases *the drive* and *this drive* are used throughout this manual to indicate the following drive models:

ST31000528AS	ST3500418AS	ST3320418AS	ST3160318AS
ST3750528AS	ST3500410AS	ST3250318AS	

Specification summary tables

The specifications listed in the following tables are for quick reference. For details on specification measurement or definition, see the appropriate section of this manual.

Table 1: Drive specifications summary for 1000 and 750GB models

Drive specification	ST31000528AS	ST3750528AS
Formatted capacity (512 bytes/sector)*	1000GB	750GB
Guaranteed sectors	1,953,525,168	1,465,149,168
Heads	4	3
Disks	2	
Bytes per sector	512	
Default sectors per track	63	
Default read/write heads	16	
Default cylinders	16,383	
Recording density (max)	1413kb/in	
Track density (avg)	236 ktracks/in	
Areal density (avg)	329Gb/in^2	
Spindle speed	7200 RPM	
Internal data transfer rate (max)	1695Mb/s	
Sustained data transfer rate OD (max)	125MB/s	
I/O data-transfer rate (max)	300MB/s	
ATA data-transfer modes supported	PIO modes: 0 to 4 Multiword DMA modes: 0 to 2 Ultra DMA modes: 0 to 6	
Cache buffer	32MB	
Height (max.)	26.1mm / 1.028 in	
Width (max.)	101.6mm /4.0 in (± 0.010 in)	
Length (max.)	146.99mm / 5.787 in	
Weight (typical)	622g /1.371 lb	
Average latency	4.16ms	
Power-on to ready (max.)	<10.0s	
Standby to ready (max.)	<10.0s	
Track-to-track seek time (typical)	<1.0ms read <1.2ms write	
Average seek, read (typical) Average seek, write (typical)	<8.5ms typical <9.5ms typical	
Startup current (typical) 12V (peak)	2.0A	
Voltage tolerance (including noise)	5V +10% / -7.5% 12V +10% / -7.5%	
Ambient temperature	0° to 60°C (operating) –40° to 70°C (non-operating)	
Temperature gradient	20°C per hour max (operating) 30°C per hour max (non-operating)	
Relative humidity	5% to 95% (operating) 5% to 95% (non-operating)	
Relative humidity gradient (max.)	30% per hour	
Wet bulb temperature (max.)	37.7°C max (operating) 40.0°C max (non-operating)	
Altitude, operating	–304.8m to 3,048m (–1000 ft to 10,000+ ft)	
Altitude, non-operating (below mean sea level, max)	–304.8m to 12,192m (–1000 ft to 40,000+ ft)	
Operational Shock (max)	70 Gs at 2ms	
Non-Operational Shock (max)	300 Gs at 2ms	

Drive specification	ST31000528AS	ST3750528AS
Vibration, operating	2Hz to 22Hz: 0.25 Gs, Limited displacement 22Hz to 350Hz: 0.50 Gs 350Hz to 500Hz: 0.25 Gs	
Vibration, non-operating	5Hz to 22Hz: 3.0 Gs 22Hz to 350Hz: 3.0 Gs 350Hz to 500Hz: 3.0 Gs	
Drive acoustics, sound power		
Idle**	2.6 bels (typical) 2.7 bels (max)	
Seek	2.8 bels (typical) 3.0 bels (max)	
Non-recoverable read errors	1 per 10^{14} bits read	
Warranty	To determine the warranty for a specific drive, use a web browser to access the following web page: support.seagate.com/customer/warranty_validation.jsp From this page, click on the “Verify Your Warranty” link. You will be asked to provide the drive serial number, model number (or part number) and country of purchase. The system will display the warranty information for your drive.	
Contact start-stop cycles	50,000 at 25°C, 50% rel. humidity	
Supports Hotplug operation per the Serial ATA Revision 2.5 specification	Yes	

*One Gbyte equals one billion bytes when referring to hard drive capacity. Accessible capacity may vary depending on operating environment and formatting.

**During periods of drive idle, some offline activity may occur according to the S.M.A.R.T. specification, which may increase acoustic and power to operational levels.

Table 2: Drive specifications summary for 500GB models

Drive specification	ST3500418AS and ST3500410AS	ST3320418AS
Formatted capacity (512 bytes/sector)*	500GB	320GB
Guaranteed sectors	976.773,168	625,142,448
Heads	2	
Disks	1	
Bytes per sector	512	
Default sectors per track	63	
Default read/write heads	16	
Default cylinders	16,383	
Recording density (max.)	1413kb/in	
Track density (avg.)	236 ktracks/in	
Areal density (avg.)	329Gb/in^2	
Spindle speed	7200 RPM	
Internal data transfer rate (max)	1695Mb/s	
Sustained data transfer rate OD (max)	125MB/s	
I/O data-transfer rate (max.)	300MB/s	
ATA data-transfer modes supported	PIO modes: 0 to 4 Multiword DMA modes: 0 to 2 Ultra DMA modes: 0 to 6	
Cache buffer	16MB	
Height (max)	19.98mm / 0.787 in	
Width (max)	101.6mm / 4.0 in (± 0.010 in)	
Length (max)	146.99mm / 5.787 in	
Weight (typical)	415g / 0.915 lb	
Average latency	4.16ms	
Power-on to ready (max)	<8.5s	
Standby to ready (max)	<8.5s	
Track-to-track seek time (typical)	<1.0ms read; <1.2ms write	
Average seek, read (typical)	<8.5ms	
Average seek, write (typical)	<9.5ms	
Startup current (typical) 12V (peak)	2.0A	
Voltage tolerance (including noise)	5V +10% / -7.5% 12V +10% / -7.5%	
Ambient temperature	0° to 60°C (operating) –40° to 70°C (non-operating)	
Temperature gradient	20°C per hour max (operating) 30°C per hour max (non-operating)	
Relative humidity	5% to 95% (operating) 5% to 95% (non-operating)	
Relative humidity gradient (max)	30% per hour	
Wet bulb temperature (max)	37.7°C (operating) 40.0°C (non-operating)	
Altitude, operating	–304.8m to 3,048m (–1000 ft to 10,000+ ft)	
Altitude, non-operating (below mean sea level, max)	–304.8m to 12,192m (–1000 ft to 40,000+ ft)	
Operational Shock (max)	70 Gs at 2ms	
Non-Operational Shock (max)	350 Gs at 2ms	

Drive specification	ST3500418AS and ST3500410AS	ST3320418AS
Vibration, operating	2Hz to 22Hz: 0.25 Gs, Limited displacement 22Hz to 350Hz: 0.50 Gs 350Hz to 500Hz: 0.25 Gs	
Vibration, non-operating	5Hz to 22Hz: 3.0 Gs 22Hz to 350Hz: 3.0 Gs 350Hz to 500Hz: 3.0 Gs	
Drive acoustics, sound power		
Idle**	2.6 bels (typical) 2.7 bels (max)	
Seek	2.8 bels (typical) 3.0 bels (max)	
Non-recoverable read errors	1 per 10^{14} bits read	
Warranty	To determine the warranty for a specific drive, use a web browser to access the following web page: support.seagate.com/customer/warranty_validation.jsp From this page, click on the “Verify Your Warranty” link. You will be asked to provide the drive serial number, model number (or part number) and country of purchase. The system will display the warranty information for your drive.	
Contact start-stop cycles	50,000 at 25°C, 50% rel. humidity	
Supports Hotplug operation per the Serial ATA Revision 2.5 specification	Yes	

*One Gbyte equals one billion bytes when referring to hard drive capacity. Accessible capacity may vary depending on operating environment and formatting.

**During periods of drive idle, some offline activity may occur according to the S.M.A.R.T. specification, which may increase acoustic and power to operational levels.

Table 3: Drive specifications summary for 250GB models

Drive specification	ST3250318AS	ST3160318AS
Formatted capacity (512 bytes/sector)*	250GB	160GB
Guaranteed sectors	488,397,168	312,581,808
Heads	1	
Disks	1	
Bytes per sector	512	
Default sectors per track	63	
Default read/write heads	16	
Default cylinders	16,383	
Recording density (max.)	1413kb/in	
Track density (avg.)	236 ktracks/in	
Areal density (avg.)	329Gb/in^2	
Spindle speed	7200 RPM	
Internal data transfer rate (max.)	1695Mb/s	
Sustained data transfer rate OD (max.)	125MB/s	
I/O data-transfer rate	300MB/s	
ATA data-transfer modes supported	PIO modes: 0 to 4 Multiword DMA modes: 0 to 2 Ultra DMA modes: 0 to 6	
Cache buffer	8MB	
Height (max.)	19.98mm / 0.787 in	
Width (max.)	101.6mm / 4.0 in ($\pm$ 0.010 in)	
Length (max.)	146.99mm / 5.787 in	
Weight (typical)	415g / 0.915 lb	
Average latency	4.16ms	
Power-on to ready (max.)	<8.5s	
Standby to ready (max.)	<8.5s	
Track-to-track seek time (typical)	<1.0ms (read) <1.2ms (write)	
Average seek, read (typical) Average seek, write (typical)	<8.5ms (read) <9.5ms (write)	
Startup current (typical) 12V (peak)	2.0A	
Voltage tolerance (including noise)	5V +10% / -7.5% 12V +10% / -7.5%	
Ambient temperature	0° to 60°C (operating) –40° to 70°C (non-operating)	
Temperature gradient (max.)	20°C per hour (operating) 30°C per hour (non-operating)	
Relative humidity	5% to 95% (operating) 5% to 95% (non-operating)	
Relative humidity gradient (max.)	30% per hour	
Wet bulb temperature	37.7°C max (operating) 40.0°C max (non-operating)	
Altitude, operating	–60.96m to 3,048m (–1000 ft to 10,000+ ft)	
Altitude, non-operating (below mean sea level, max.)	–60.96m to 12,192m (–1000 ft to 40,000+ ft)	
Operational Shock (max.)	70 Gs at 2ms	
Non-Operational Shock (max.)	350 Gs at 2ms	

Drive specification	ST3250318AS	ST3160318AS
Vibration, operating	2Hz to 22Hz: 0.25 Gs, Limited displacement 22Hz to 350Hz: 0.50 Gs 350Hz to 500Hz: 0.25 Gs	
Vibration, non-operating	5Hz to 22Hz: 3.0 Gs 22Hz to 350Hz: 3.0 Gs 350Hz to 500Hz: 3.0 Gs	
Drive acoustics, sound power		
Idle**	2.6 bels (typical) 2.7 bels (max)	
Seek	2.8 bels (typical) 3.0 bels (max)	
Non-recoverable read errors	1 per 10^{14} bits read	
Warranty	To determine the warranty for a specific drive, use a web browser to access the following web page: support.seagate.com/customer/warranty_validation.jsp From this page, click on the “Verify Your Warranty” link. You will be asked to provide the drive serial number, model number (or part number) and country of purchase. The system will display the warranty information for your drive.	
Contact start-stop cycles	50,000 at 25°C, 50% rel. humidity	
Supports Hotplug operation per the Serial ATA Revision 2.5 specification	Yes	

*One Gbyte equals one billion bytes when referring to hard drive capacity. Accessible capacity may vary depending on operating environment and formatting.

**During periods of drive idle, some offline activity may occur according to the S.M.A.R.T. specification, which may increase acoustic and power to operational levels.

2.1 Formatted capacity

Model	Formatted capacity*	Guaranteed sectors	Bytes per sector
ST31000528AS	1000GB	1,953,525,168	512
ST3750528AS	750GB	1,465,149,168	
ST3500418AS ST3500410AS	500GB	976,773,168	
ST3320418AS	320GB	625,142,448	
ST3250318AS	250GB	488,397,168	
ST3160318AS	160GB	312,581,808	

*One Gbyte equals one billion bytes when referring to hard drive capacity. Accessible capacity may vary depending on operating environment and formatting.

2.1.1 LBA mode

When addressing these drives in LBA mode, all blocks (sectors) are consecutively numbered from 0 to *n–1,* where *n* is the number of guaranteed sectors as defined above.

See Section 4.3.1, "Identify Device command" (words 60-61 and 100-103) for additional information about 48-bit addressing support of drives with capacities over 137GB.

2.2 Default logical geometry

Cylinders	Read/write heads	Sectors per track
16,383	16	63

LBA mode
When addressing these drives in LBA mode, all blocks (sectors) are consecutively numbered from 0 to *n–1,* where *n* is the number of guaranteed sectors as defined above.

2.3 Recording and interface technology

Interface	Serial ATA (SATA)
Recording method	Perpendicular
Recording density (kbits/inch max)	1413
Track density (ktracks/inch avg)	236
Areal density (Gbits/inch^2 avg)	329
Spindle speed (RPM)	7,200 ± 0.2%
Internal data transfer rate (Mbits/sec max)	1695
Sustained data transfer rate (Mbytes/sec max)	125
I/O data-transfer rate (Mbytes/sec max)	300

2.4 Physical characteristics

Maximum height	
1000 and 750GB models	26.1mm / 1.028 in
500, 320, 250 and 160GB models	19.98mm / 0.787 in
Maximum width	101.6mm / 4.000 (± 0.010 in)
Maximum length	146.99mm / 5.787 in
Typical weight	
1000 and 750GB models	622g / 1.371 lb
500, 320, 250 and 160GB models	415g / 0.915 lb
Cache buffer	
1000 and 750GB models	32MB (32,768kb)
500 and 320GB models	16MB (16,384kb)
250 and 160GB models	8MB (8,192kb)

2.5 Seek time

Seek measurements are taken with nominal power at 25°C ambient temperature. All times are measured using drive diagnostics. The specifications in the table below are defined as follows:

- Track-to-track seek time is an average of all possible single-track seeks in both directions.
- Average seek time is a true statistical random average of at least 5,000 measurements of seeks between random tracks, less overhead.

Typical seek times (ms)	Read	Write
Track-to-track	1.0	1.2
Average	8.5	9.5
Average latency:	4.16	

Note. These drives are designed to consistently meet the seek times represented in this manual. Physical seeks, regardless of mode (such as track-to-track and average), are expected to meet the noted values. However, due to the manner in which these drives are formatted, benchmark tests that include command overhead or measure logical seeks may produce results that vary from these specifications.

2.6 Start/stop times

	1000 and 750GB models	500, 320, 250 and 160GB models
Power-on to Ready (typ / max sec)	<10.0	<8.5
Standby to Ready (typ / max sec)	<10.0	<8.5
Ready to spindle stop (typ / max sec)	10	

2.7 Power specifications

The drive receives DC power (+5V or +12V) through a native SATA power connector. See Figure 2 on page 22.

2.7.1 Power consumption

Power requirements for the drives are listed in the table on page 9. Typical power measurements are based on an average of drives tested, under nominal conditions, using 5.0V and 12.0V input voltage at 25°C ambient temperature.

- **Spinup power**

  Spinup power is measured from the time of power-on to the time that the drive spindle reaches operating speed.

- **Read/write power and current**

  Read/write power is measured with the heads on track, based on a 16-sector write followed by a 32-ms delay, then a 16-sector read followed by a 32-ms delay.

- **Operating power and current**

  Operating power is measured using 40 percent random seeks, 40 percent read/write mode (1 write for each 10 reads) and 20 percent drive idle mode.

- **Idle mode power**

  Idle mode power is measured with the drive up to speed, with servo electronics active and with the heads in a random track location.

- **Standby mode**

  During Standby mode, the drive accepts commands, but the drive is not spinning, and the servo and read/write electronics are in power-down mode.

Table 4: DC power requirements

Power dissipation (2-disk values shown)	Avg (watts 25° C)	Avg 5V typ amps	Avg 12V typ amps
Spinup	—	—	2.0 (peak)
Idle* †	5.0	0.168	0.337
Idle* † (with offline activity)	5.40	0.153	0.387
Operating	6.57	0.496	0.341
Standby	0.79	0.35	0.01
Sleep	0.79	0.35	0.01

Table 5: DC power requirements

Power dissipation (1-disk values shown)	Avg (watts 25° C)	Avg 5V typ amps	Avg 12V typ amps
Spinup	—	—	2.0 (peak)
Idle* †	4.60	0.378	0.224
Idle* † (with offline activity)	4.50	0.250	0.240
Operating	6.19	0.656	0.243
Standby	0.79	0.35	0.01
Sleep	0.79	0.35	0.01

*During periods of drive idle, some offline activity may occur according to the S.M.A.R.T. specification, which may increase acoustic and power to operational levels.
†5W IDLE with DIPLM Enabled

2.7.2 Conducted noise

Input noise ripple is measured at the host system power supply across an equivalent 80-ohm resistive load on the +12 volt line or an equivalent 15-ohm resistive load on the +5 volt line.

- Using 12-volt power, the drive is expected to operate with a maximum of 120 mV peak-to-peak square-wave injected noise at up to 10MHz.
- Using 5-volt power, the drive is expected to operate with a maximum of 100 mV peak-to-peak square-wave injected noise at up to 10MHz.

Note. Equivalent resistance is calculated by dividing the nominal voltage by the typical RMS read/write current.

2.7.3 Voltage tolerance

Voltage tolerance (including noise):

5V +10% / -7.5%
12V +10% / -7.5%

2.7.4 Power-management modes

The drive provides programmable power management to provide greater energy efficiency. In most systems, you can control power management through the system setup program. The drive features the following power-management modes:

Power modes	Heads	Spindle	Buffer
Active	Tracking	Rotating	Enabled
Idle	Tracking	Rotating	Enabled
Standby	Parked	Stopped	Enabled
Sleep	Parked	Stopped	Disabled

- **Active mode**

  The drive is in Active mode during the read/write and seek operations.

- **Idle mode**

  The buffer remains enabled, and the drive accepts all commands and returns to Active mode any time disk access is necessary.

- **Standby mode**

  The drive enters Standby mode when the host sends a Standby Immediate command. If the host has set the standby timer, the drive can also enter Standby mode automatically after the drive has been inactive for a specifiable length of time. The standby timer delay is established using a Standby or Idle command. In Standby mode, the drive buffer is enabled, the heads are parked and the spindle is at rest. The drive accepts all commands and returns to Active mode any time disk access is necessary.

- **Sleep mode**

  The drive enters Sleep mode after receiving a Sleep command from the host. In Sleep mode, the drive buffer is disabled, the heads are parked and the spindle is at rest. The drive leaves Sleep mode after it receives a Hard Reset or Soft Reset from the host. After receiving a reset, the drive exits Sleep mode and enters Standby mode with all current translation parameters intact.

- **Idle and Standby timers**

  Each time the drive performs an Active function (read, write or seek), the standby timer is reinitialized and begins counting down from its specified delay times to zero. If the standby timer reaches zero before any drive activity is required, the drive makes a transition to Standby mode. In both Idle and Standby mode, the drive accepts all commands and returns to Active mode when disk access is necessary.

2.8 Environmental specifications

2.8.1 Ambient temperature

Ambient temperature is defined as the temperature of the environment immediately surrounding the drive. Actual drive case temperature should not exceed 69°C (156°F) within the operating ambient conditions.

Operating:	0° to 60°C (32° to 140°F)
Non-operating:	–40° to 70°C (–40° to 158°F)

2.8.2 Temperature gradient

Operating:	20°C per hour (68°F per hour max), without condensation
Non-operating:	30°C per hour (86°F per hour max)

2.8.3 Humidity

2.8.3.1 Relative humidity

Operating:	5% to 95% non-condensing (30% per hour max)
Nonoperating:	5% to 95% non-condensing (30% per hour max)

2.8.3.2 Wet bulb temperature

Operating:	37.7°C (99.9°F max)
Non-operating:	40°C (104°F max)

2.8.4 Altitude

Operating:	–304.8 m to 3,048 m (–1000 ft. to 10,000+ ft.)
Non-operating:	–304.8 m to 12,192 m (–1000 ft. to 40,000+ ft.)

2.8.5 Shock

All shock specifications assume that the drive is mounted securely with the input shock applied at the drive mounting screws. Shock may be applied in the X, Y or Z axis.

2.8.5.1 Operating shock

These drives comply with the performance levels specified in this document when subjected to a maximum operating shock of 70 Gs based on half-sine shock pulses of 2 ms during read operations. Shocks should not be repeated more than two times per second.

2.8.5.2 Non-operating shock

1000 and 750GB models

The non-operating shock level that the drive can experience without incurring physical damage or degradation in performance when subsequently put into operation is 300 Gs based on a non-repetitive half-sine shock pulse of 2 ms duration.

500, 320, 250 and 160GB models

The non-operating shock level that the drive can experience without incurring physical damage or degradation in performance when subsequently put into operation is 350 Gs based on a non-repetitive half-sine shock pulse of 2-ms duration.

2.8.6 Vibration

All vibration specifications assume that the drive is mounted securely with the input vibration applied at the drive mounting screws. Vibration may be applied in the X, Y or Z axis.

2.8.6.1 Operating vibration

The maximum vibration levels that the drive may experience while meeting the performance standards specified in this document are specified below.

2Hz to 22Hz	0.25 Gs (Limited displacement)
22Hz to 350Hz	0.50 Gs
350Hz to 500Hz	0.25 Gs

2.8.6.2 Non-operating vibration

The maximum non-operating vibration levels that the drive may experience without incurring physical damage or degradation in performance when subsequently put into operation are specified below.

5Hz to 22Hz	3.0 Gs (Limited displacement)
22Hz to 350Hz	3.0 Gs
350Hz to 500Hz	3.0 Gs

2.9 Acoustics

Drive acoustics are measured as overall A-weighted acoustic sound power levels (no pure tones). All measurements are consistent with ISO document 7779. Sound power measurements are taken under essentially free-field conditions over a reflecting plane. For all tests, the drive is oriented with the cover facing upward.

Note. For seek mode tests, the drive is placed in seek mode only. The number of seeks per second is defined by the following equation:

(Number of seeks per second = 0.4 / (average latency + average access time)

Table 6: Fluid Dynamic Bearing (FDB) motor acoustics

	Idle*	Seek
All models	2.6 bels (typ) 2.7 bels (max)	2.8 bels (typ) 3.0 bels (max)

*During periods of drive idle, some offline activity may occur according to the S.M.A.R.T. specification, which may increase acoustic and power to operational levels.

2.9.1 Test for Prominent Discrete Tones (PDTs)

Seagate follows the ECMA-74 standards for measurement and identification of PDTs. An exception to this process is the use of the absolute threshold of hearing. Seagate uses this threshold curve (originated in ISO 389-7) to discern tone audibility and to compensate for the inaudible components of sound prior to computation of tone ratios according to Annex D of the ECMA-74 standards.

2.10 Electromagnetic immunity

When properly installed in a representative host system, the drive operates without errors or degradation in performance when subjected to the radio frequency (RF) environments defined in the following table:

Table 7: Radio frequency environments

Test	Description	Performance level	Reference standard
Electrostatic discharge	Contact, HCP, VCP: ± 4 kV; Air: ± 8 kV	B	EN61000-4-2: 95
Radiated RF immunity	80MHz to 1,000MHz, 3 V/m, 80% AM with 1kHz sine 900MHz, 3 V/m, 50% pulse modulation @ 200Hz	A	EN61000-4-3: 96 ENV50204: 95
Electrical fast transient	± 1 kV on AC mains, ± 0.5 kV on external I/O	B	EN61000-4-4: 95
Surge immunity	± 1 kV differential, ± 2 kV common, AC mains	B	EN61000-4-5: 95
Conducted RF immunity	150kHz to 80MHz, 3 Vrms, 80% AM with 1kHz sine	A	EN61000-4-6: 97
Voltage dips, interrupts	0% open, 5 seconds 0% short, 5 seconds 40%, 0.10 seconds 70%, 0.01 seconds	C C C B	EN61000-4-11: 94

2.11 Warranty

To determine the warranty for a specific drive, use a web browser to access the following web page:
support.seagate.com/customer/warranty_validation.jsp

From this page, click on the “Verify Your Warranty” link. You will be asked to provide the drive serial number, model number (or part number) and country of purchase. The system will display the warranty information for your drive.

2.12 Agency certification

2.12.1 Safety certification

These products are certified to meet the requirements of UL60950-1, CSA60950-1 and EN60950 and so marked as to the certify agency.

2.12.2 Electromagnetic compatibility

Hard drives that display the CE mark comply with the European Union (EU) requirements specified in the Electromagnetic Compatibility Directive (2004/108/EC) as put into place 20 July 2007. Testing is performed to the levels specified by the product standards for Information Technology Equipment (ITE). Emission levels are defined by EN 55022, Class B and the immunity levels are defined by EN 55024.

Drives are tested in representative end-user systems. Although CE-marked Seagate drives comply with the directives when used in the test systems, we cannot guarantee that all systems will comply with the directives. The drive is designed for operation inside a properly designed enclosure, with properly shielded I/O cable (if necessary) and terminators on all unused I/O ports. Computer manufacturers and system integrators should confirm EMC compliance and provide CE marking for their products.

Korean RRL

If these drives have the Korean Communications Commission (KCC) logo, they comply with paragraph 1 of Article 11 of the Electromagnetic Compatibility control Regulation and meet the Electromagnetic Compatibility (EMC) Framework requirements of the Radio Research Laboratory (RRL) Communications Commission, Republic of Korea.

These drives have been tested and comply with the Electromagnetic Interference/Electromagnetic Susceptibility (EMI/EMS) for Class B products. Drives are tested in a representative, end-user system by a Korean-recognized lab.

- Family name: Barracuda 7200.12
- Certificate number: STX - 720012 (B)

Australian C-Tick (N176)

If these models have the C-Tick marking, they comply with the Australia/New Zealand Standard AS/NZ CISPR22 and meet the Electromagnetic Compatibility (EMC) Framework requirements of the Australian Communication Authority (ACA).

2.12.3 FCC verification

These drives are intended to be contained solely within a personal computer or similar enclosure (not attached as an external device). As such, each drive is considered to be a subassembly even when it is individually marketed to the customer. As a subassembly, no Federal Communications Commission verification or certification of the device is required.

Seagate has tested this device in enclosures as described above to ensure that the total assembly (enclosure, disk drive, motherboard, power supply, etc.) does comply with the limits for a Class B computing device, pursuant to Subpart J, Part 15 of the FCC rules. Operation with non-certified assemblies is likely to result in interference to radio and television reception.

Radio and television interference. This equipment generates and uses radio frequency energy and if not installed and used in strict accordance with the manufacturer's instructions, may cause interference to radio and television reception.

This equipment is designed to provide reasonable protection against such interference in a residential installation. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause interference to radio or television, which can be determined by turning the equipment on and off, you are encouraged to try one or more of the following corrective measures:

- Reorient the receiving antenna.
- Move the device to one side or the other of the radio or TV.
- Move the device farther away from the radio or TV.
- Plug the computer into a different outlet so that the receiver and computer are on different branch outlets.

If necessary, you should consult your dealer or an experienced radio/television technician for additional suggestions. You may find helpful the following booklet prepared by the Federal Communications Commission: *How to Identify and Resolve Radio-Television Interference Problems*. This booklet is available from the Superintendent of Documents, U.S. Government Printing Office, Washington, DC 20402. Refer to publication number 004-000-00345-4.

2.13 Environmental protection

Seagate designs its products to meet environmental protection requirements worldwide, including regulations restricting certain chemical substances.

2.13.1 European Union Restriction of Hazardous Substances (RoHS) Directive

The European Union Restriction of Hazardous Substances (RoHS) Directive, restricts the presence of chemical substances, including Lead, Cadmium, Mercury, Hexavalent Chromium, PBB and PBDE, in electronic products, effective July 2006. This drive is manufactured with components and materials that comply with the RoHS Directive.

2.13.2 China Restriction of Hazardous Substances (RoHS) Directive 中国限制危险物品的指令

This product has an Environmental Protection Use Period (EPUP) of 20 years. The following table contains information mandated by China's "Marking Requirements for Control of Pollution Caused by Electronic Information Products" Standard.

该产品具有20年的环境保护使用周期 （EPUP）。 下表包含了中国 “电子产品所导致的污染的控制的记号要求”所指定的信息。

Name of Parts 部件名称	Toxic or Hazardous Substances or Elements有毒有害物质或元素					
	Lead 铅 （Pb）	Mercury 汞 （Hg）	Cadmium 镉 （Cd）	Hexavalent Chromium 六价铬 （Cr6+）	Polybrominated Diphenyl 多溴联苯 （PBB）	Polybrominated Diphenyl Ether 多溴二苯醚 （PBDE）
PCBA	X	O	O	O	O	O
HDA	X	O	O	O	O	O

"O" indicates the hazardous and toxic substance content of the part (at the homogenous material level) is lower than the threshold defined by the China RoHS MCV Standard.

“O”表示该部件（于同类物品程度上）所含的危险和有毒物质低于中国RoHS MCV标准所定义的门槛值。

"X" indicates the hazardous and toxic substance content of the part (at the homogenous material level) is over the threshold defined by the China RoHS MCV Standard.

“X”表示该部件（于同类物品程度上）所含的危险和有毒物质超出中国RoHS MCV标准所定义的门槛值。

2.14 Corrosive environment

Seagate electronic drive components pass accelerated corrosion testing equivalent to 10 years exposure to light industrial environments containing sulfurous gases, chlorine and nitric oxide, classes G and H per ASTM B845. However, this accelerated testing cannot duplicate every potential application environment. Users should use caution exposing any electronic components to uncontrolled chemical pollutants and corrosive chemicals as electronic drive component reliability can be affected by the installation environment. The silver, copper, nickel and gold films used in Seagate products are especially sensitive to the presence of sulfide, chloride, and nitrate contaminants. Sulfur is found to be the most damaging. In addition, electronic components should never be exposed to condensing water on the surface of the printed circuit board assembly (PCBA) or exposed to an ambient relative humidity greater than 95%. Materials used in cabinet fabrication, such as vulcanized rubber, that can outgas corrosive compounds should be minimized or eliminated. The useful life of any electronic equipment may be extended by replacing materials near circuitry with sulfide-free alternatives.

3.0 Configuring and mounting the drive

This section contains the specifications and instructions for configuring and mounting the drive.

3.1 Handling and static-discharge precautions

After unpacking, and before installation, the drive may be exposed to potential handling and electrostatic discharge (ESD) hazards. Observe the following standard handling and static-discharge precautions:

Caution:

- Before handling the drive, put on a grounded wrist strap, or ground yourself frequently by touching the metal chassis of a computer that is plugged into a grounded outlet. Wear a grounded wrist strap throughout the entire installation procedure.
- Handle the drive by its edges or frame *only*.
- The drive is extremely fragile—handle it with care. Do not press down on the drive top cover.
- Always rest the drive on a padded, antistatic surface until you mount it in the computer.
- Do not touch the connector pins or the printed circuit board.
- Do not remove the factory-installed labels from the drive or cover them with additional labels. Removal voids the warranty. Some factory-installed labels contain information needed to service the drive. Other labels are used to seal out dirt and contamination.

3.2 Configuring the drive

Each drive on the Serial ATA interface connects point-to-point with the Serial ATA host adapter. There is no master/slave relationship because each drive is considered a master in a point-to-point relationship. If two drives are attached on one Serial ATA host adapter, the host operating system views the two devices as if they were both “masters” on two separate ports. Both drives behave as if they are Device 0 (master) devices.

Serial ATA drives are designed for easy installation. It is usually not necessary to set any jumpers on the drive for proper operation; however, if you connect the drive and receive a “drive not detected” error, your SATA-equipped motherboard or host adapter may use a chipset that does not support SATA speed autonegotiation. If you have a motherboard or host adapter that does not support autonegotiation:

- Install a jumper as shown in Figure 1 below to limit the data transfer rate to 1.5 Gbits/sec (and leave the drive connected to the SATA-equipped motherboard or host adapter that doesn’t support autonegotiation) or
- Install a SATA host adapter that supports autonegotiation, leave the drive jumper block set to “Normal operation” (see Figure 1 below), and connect the drive to that adapter. This option has the benefit of not limiting the drive to a 1.5 Gbits/sec transfer rate.

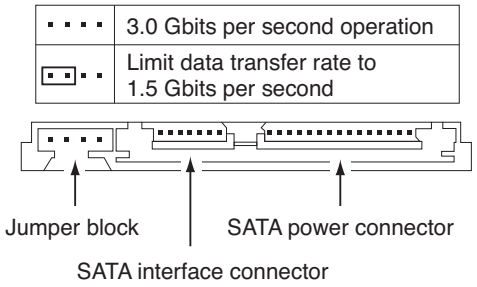

Figure 1. Serial ATA connectors

3.3 Serial ATA cables and connectors

The Serial ATA interface cable consists of four conductors in two differential pairs, plus three ground connections. The cable size may be 30 to 26 AWG with a maximum length of one meter (39.37 inches). See Table 8 for connector pin definitions. Either end of the SATA signal cable can be attached to the drive or host.

For direct backplane connection, the drive connectors are inserted directly into the host receptacle. The drive and the host receptacle incorporate features that enable the direct connection to be hot pluggable and blind mateable.

For installations which require cables, you can connect the drive as illustrated in Figure 2.

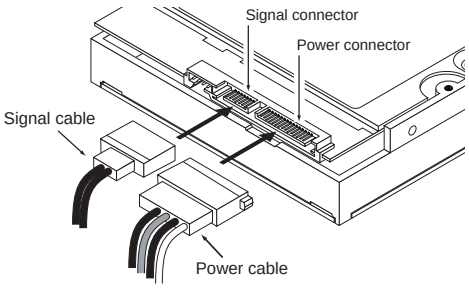

Figure 2. Attaching SATA cabling

Each cable is keyed to ensure correct orientation. Barracuda 7200.12 Serial ATA drives support latching SATA connectors.

3.4 Drive mounting

You can mount the drive in any orientation using four screws in the side-mounting holes or four screws in the bottom-mounting holes. See Figure 3 for drive mounting dimensions. Follow these important mounting precautions when mounting the drive:

- Allow a minimum clearance of 0.030 inches (0.76mm) around the entire perimeter of the drive for cooling.
- Use only 6-32 UNC mounting screws.
- The screws should be inserted no more than 0.150 inch (3.81mm) into the bottom or side mounting holes.
- Do not overtighten the mounting screws (maximum torque: 6 inch-lb).

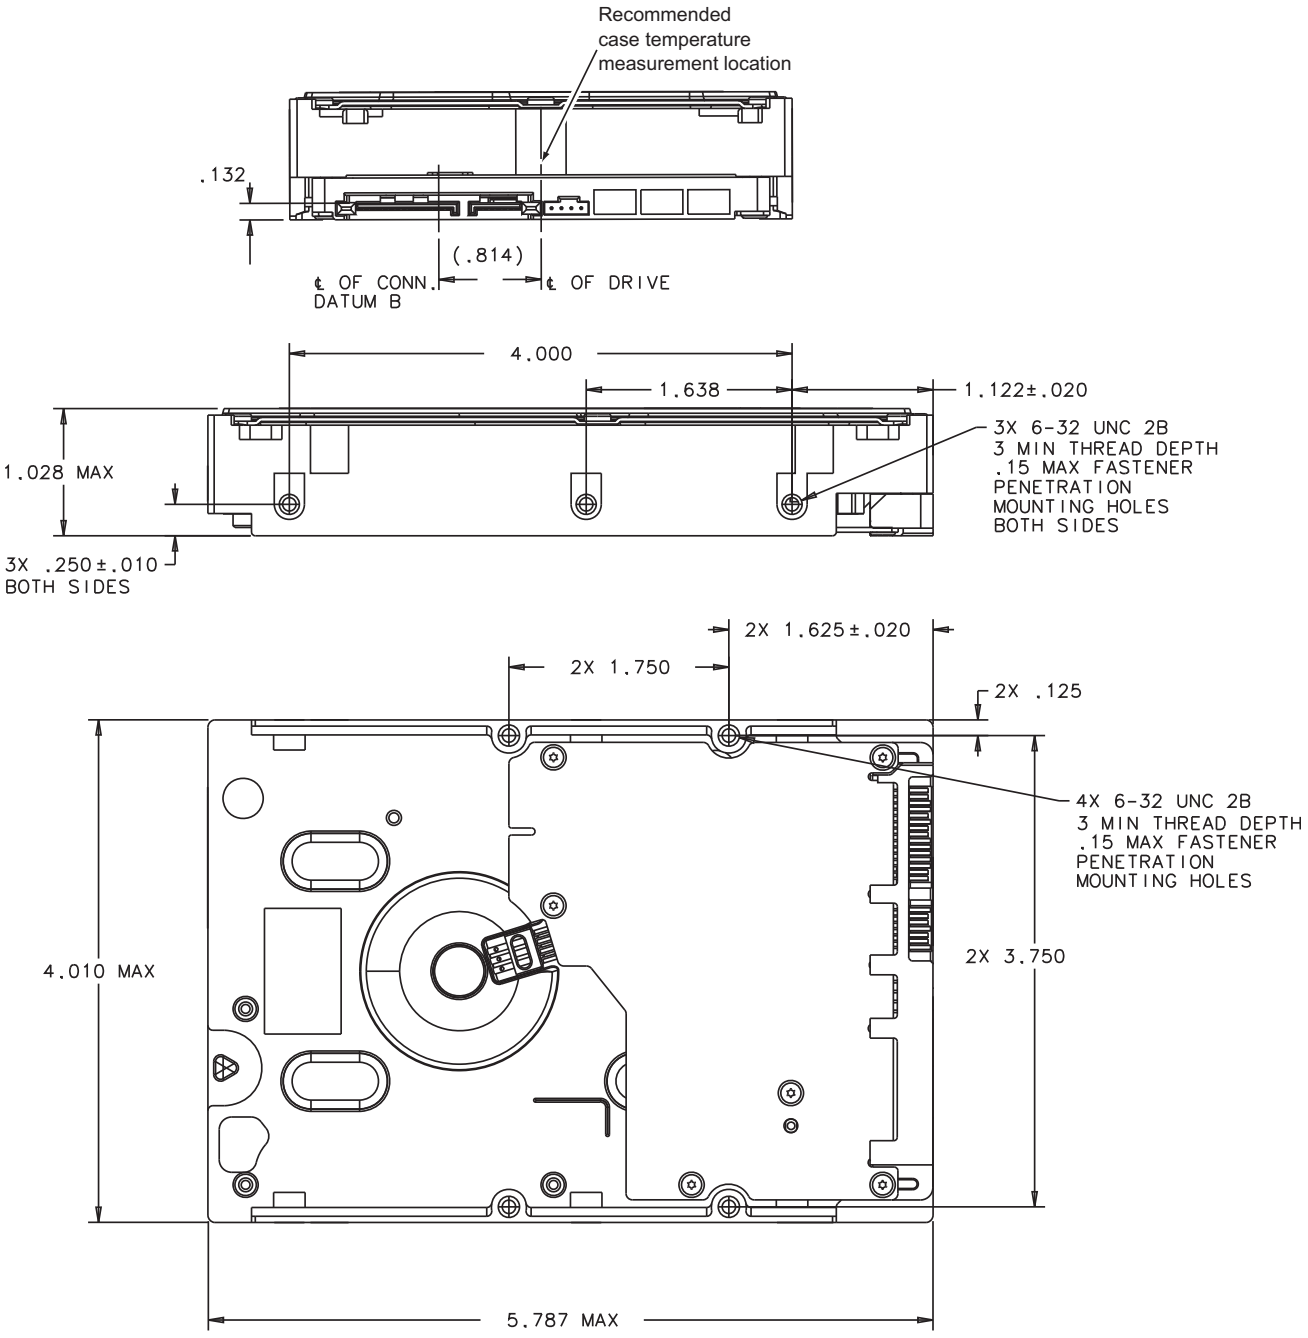

Figure 3. Mounting dimensions (1000 and 750GB models)

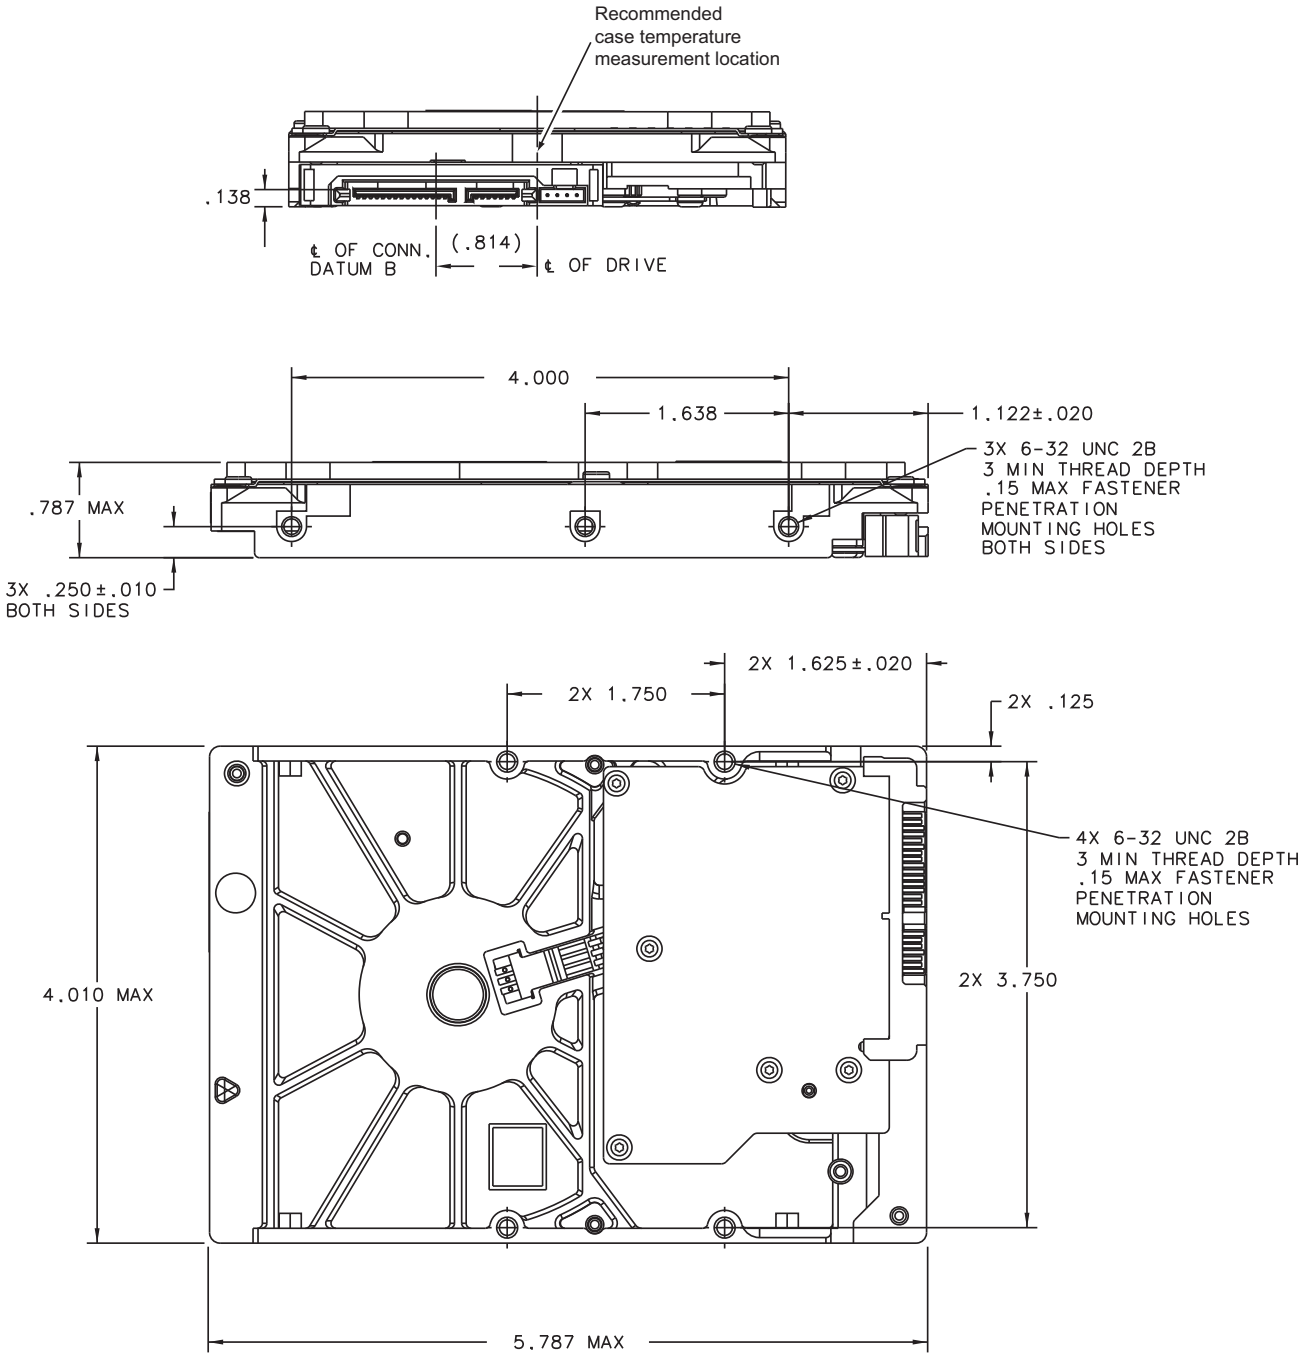

Figure 4. Mounting dimensions (500, 320, 250 and 160GB models)

4.0 Serial ATA (SATA) interface

These drives use the industry-standard Serial ATA interface that supports FIS data transfers. It supports ATA programmed input/output (PIO) modes 0 to 4; multiword DMA modes 0 to 2, and Ultra DMA modes 0 to 6.

For detailed information about the Serial ATA interface, refer to the “Serial ATA: High Speed Serialized AT Attachment” specification.

4.1 Hot-Plug compatibility

Barracuda 7200.12 Serial ATA drives incorporate connectors which enable you to hot plug these drives in accordance with the Serial ATA Revision 2.5 specification. This specification can be downloaded from www.serial-ata.org.

4.2 Serial ATA device plug connector pin definitions

Table 8 summarizes the signals on the Serial ATA interface and power connectors.

Table 8: Serial ATA connector pin definitions

Segment	Pin	Function	Definition
	S1	Ground	2nd mate
	S2	A+	Differential signal pair A from Phy
	S3	A-	
	S4	Ground	2nd mate
	S5	B-	Differential signal pair B from Phy
	S6	B+	
Signal	S7	Ground	2nd mate
Key and spacing separate signal and power segments			
	P1	V_{33}	3.3V power
	P2	V_{33}	3.3V power
	P3	V_{33}	3.3V power, pre-charge, 2nd mate
	P4	Ground	1st mate
	P5	Ground	2nd mate
	P6	Ground	2nd mate
	P7	V_5	5V power, pre-charge, 2nd mate
Power	P8	V_5	5V power
	P9	V_5	5V power
	P10	Ground	2nd mate
	P11	Ground or LED signal	If grounded, drive does not use deferred spin
	P12	Ground	1st mate.
	P13	V_{12}	12V power, pre-charge, 2nd mate
	P14	V_{12}	12V power
	P15	V_{12}	12V power

Notes:

1. All pins are in a single row, with a 1.27 mm (0.050”) pitch.
2. The comments on the mating sequence apply to the case of backplane blindmate connector only. In this case, the mating sequences are:
   - the ground pins P4 and P12.
   - the pre-charge power pins and the other ground pins.
   - the signal pins and the rest of the power pins.
3. There are three power pins for each voltage. One pin from each voltage is used for pre-charge when installed in a blind-mate backplane configuration.
4. All used voltage pins (V_x) must be terminated.

4.3 Supported ATA commands

The following table lists Serial ATA standard commands that the drive supports.
For a detailed description of the ATA commands, refer to the Serial ATA International Organization: Serial ATA Revision 2.6 (http://www.sata-io.org).

See “S.M.A.R.T. commands” on page 34 for details and subcommands used in the S.M.A.R.T. implementation.

Table 9: Supported ATA commands

Command name	Command code (in hex)
Check Power Mode	$E5_H$
Device Configuration Freeze Lock	$B1_H$ / $C1_H$
Device Configuration Identify	$B1_H$ / $C2_H$
Device Configuration Restore	$B1_H$ / $C0_H$
Device Configuration Set	$B1_H$ / $C3_H$
Device Reset	08_H
Download Microcode	92_H
Execute Device Diagnostics	90_H
Flush Cache	$E7_H$
Flush Cache Extended	EA_H
Format Track	50_H
Identify Device	EC_H
Idle	$E3_H$
Idle Immediate	$E1_H$
Initialize Device Parameters	91_H
Read Buffer	$E4_H$
Read DMA	$C8_H$
Read DMA Extended	25_H
Read DMA Without Retries	$C9_H$
Read Log Ext	$2F_H$
Read Multiple	$C4_H$
Read Multiple Extended	29_H
Read Native Max Address	$F8_H$
Read Native Max Address Extended	27_H
Read Sectors	20_H
Read Sectors Extended	24_H
Read Sectors Without Retries	21_H
Read Verify Sectors	40_H
Read Verify Sectors Extended	42_H
Read Verify Sectors Without Retries	41_H
Recalibrate	10_H
Security Disable Password	$F6_H$

Command name	Command code (in hex)
Security Erase Prepare	$F3_H$
Security Erase Unit	$F4_H$
Security Freeze	$F5_H$
Security Set Password	$F1_H$
Security Unlock	$F2_H$
Seek	70_H
Set Features	EF_H
Set Max Address Note: Individual Set Max Address commands are identified by the value placed in the Set Max Features register as defined to the right.	$F9_H$ Address: 00_H Password: 01_H Lock: 02_H Unlock: 03_H Freeze Lock: 04_H
Set Max Address Extended	37_H
Set Multiple Mode	$C6_H$
Sleep	$E6_H$
S.M.A.R.T. Disable Operations	$B0_H$ / $D9_H$
S.M.A.R.T. Enable/Disable Autosave	$B0_H$ / $D2_H$
S.M.A.R.T. Enable Operations	$B0_H$ / $D8_H$
S.M.A.R.T. Execute Offline	$B0_H$ / $D4_H$
S.M.A.R.T. Read Attribute Thresholds	$B0_H$ / $D1_H$
S.M.A.R.T. Read Data	$B0_H$ / $D0_H$
S.M.A.R.T. Read Log Sector	$B0_H$ / $D5_H$
S.M.A.R.T. Return Status	$B0_H$ / DA_H
S.M.A.R.T. Save Attribute Values	$B0_H$ / $D3_H$
S.M.A.R.T. Write Log Sector	$B0_H$ / $D6_H$
Standby	$E2_H$
Standby Immediate	$E0_H$
Write Buffer	$E8_H$
Write DMA	CA_H
Write DMA Extended	35_H
Write DMA FUA Extended	$3D_H$
Write DMA Without Retries	CB_H
Write Log Extended	$3F_H$
Write Multiple	$C5_H$
Write Multiple Extended	39_H
Write Multiple FUA Extended	CE_H
Write Sectors	30_H
Write Sectors Without Retries	31_H
Write Sectors Extended	34_H
Write Uncorrectable	45_H

4.3.1 Identify Device command

The Identify Device command (command code EC_H) transfers information about the drive to the host following power up. The data is organized as a single 512-byte block of data, whose contents are shown in Table 9 on page 27. All reserved bits or words should be set to zero. Parameters listed with an "x" are drive-specific or vary with the state of the drive. See Section 2.0 on page 3 for default parameter settings.

The following commands contain drive-specific features that may not be included in the Serial ATA specification.

Word	Description	Value
0	Configuration information: • Bit 15: 0 = ATA; 1 = ATAPI • Bit 7: removable media • Bit 6: removable controller • Bit 0: reserved	$0C5A_H$
1	Number of logical cylinders	16,383
2	ATA-reserved	0000_H
3	Number of logical heads	16
4	Retired	0000_H
5	Retired	0000_H
6	Number of logical sectors per logical track: 63	$003F_H$
7–9	Retired	0000_H
10–19	Serial number: (20 ASCII characters, 0000_H = none)	ASCII
20	Retired	0000_H
21	Retired	0400_H
22	Obsolete	0000_H
23–26	Firmware revision (8 ASCII character string, padded with blanks to end of string)	x.xx
27–46	Drive model number: (40 ASCII characters, padded with blanks to end of string)	
47	(Bits 7–0) Maximum sectors per interrupt on Read multiple and Write multiple (16)	8010_H
48	Reserved	0000_H
49	Standard Standby timer, IORDY supported and may be disabled	$2F00_H$
50	ATA-reserved	0000_H
51	PIO data-transfer cycle timing mode	0200_H
52	Retired	0200_H
53	Words 54–58, 64–70 and 88 are valid	0007_H
54	Number of current logical cylinders	$xxxx_H$
55	Number of current logical heads	$xxxx_H$
56	Number of current logical sectors per logical track	$xxxx_H$
57–58	Current capacity in sectors	$xxxx_H$
59	Number of sectors transferred during a Read Multiple or Write Multiple command	$xxxx_H$

Word	Description	Value
60–61	Total number of user-addressable LBA sectors available (see Section 2.1 for related information) *Note: The maximum value allowed in this field is: 0FFFFFFFh (268,435,455 sectors, 137GB). Drives with capacities over 137GB will have 0FFFFFFFh in this field and the actual number of user-address-able LBAs specified in words 100-103. This is required for drives that support the 48-bit addressing feature.	0FFFFFFFh*
62	Retired	0000_H
63	Multiword DMA active and modes supported (see note following this table)	$xx07_H$
64	Advanced PIO modes supported (modes 3 and 4 supported)	0003_H
65	Minimum multiword DMA transfer cycle time per word (120 nsec)	0078_H
66	Recommended multiword DMA transfer cycle time per word (120 nsec)	0078_H
67	Minimum PIO cycle time without IORDY flow control (240 nsec)	$00F0_H$
68	Minimum PIO cycle time with IORDY flow control (120 nsec)	0078_H
69–74	ATA-reserved	0000_H
75	Queue depth	$001F_H$
76	Serial ATA capabilities	$xxxx_H$
77	Reserved for future Serial ATA definition	$xxxx_H$
78	Serial ATA features supported	$xxxx_H$
79	Serial ATA features enabled	$xxxx_H$
80	Major version number	$003E_H$
81	Minor version number	0028_H
82	Command sets supported	$364B_H$
83	Command sets supported	$7C03_H$
84	Command sets support extension (see note following this table)	4003_H See Word 108-111 note. (4003H = 0100000000000011 binary)
85	Command sets enabled	$30xx_H$
86	Command sets enabled	0001_H
87	Command sets enable extension	4000_H
88	Ultra DMA support and current mode (see note following this table)	$xx3F_H$
89	Security erase time	0000_H
90	Enhanced security erase time	0000_H
92	Master password revision code	$FFFE_H$
93	Hardware reset value	$xxxx_H$
95–99	ATA-reserved	0000_H
100–103	Total number of user-addressable LBA sectors available (see Section 2.1 for related information). These words are required for drives that support the 48-bit addressing feature. Maximum value: 0000FFFFFFFFFFFFh.	ST31000528AS = 1,953,525,168 ST3750528AS = 1,465,149,168 ST3500418AS = 976,773,168 ST3500410AS = 976,773,168 ST3320418AS = 625,142,448 ST3250318AS = 488,397,168 ST3160318AS = 312,581,808

Word	Description	Value
104–107	ATA-reserved	0000_H
108–111	The mandatory value of the world wide name (WWN) for the drive. NOTE: This field is valid if word 84, bit 8 is set to 1 indicating 64-bit WWN support.	Each drive will have a unique value.
112–127	ATA-reserved	0000_H
128	Security status	0001_H
129–159	Seagate-reserved	$xxxx_H$
160–254	ATA-reserved	0000_H
255	Integrity word	$xxA5_H$

Note. Advanced Power Management (APM) and Automatic Acoustic Management (AAM) features are not supported

Note. See the bit descriptions below for words 63, 84, and 88 of the Identify Drive data.

Description (if bit is set to 1)		
	Bit	**Word 63**
	0	Multiword DMA mode 0 is supported.
	1	Multiword DMA mode 1 is supported.
	2	Multiword DMA mode 2 is supported.
	8	Multiword DMA mode 0 is currently active.
	9	Multiword DMA mode 1 is currently active.
	10	Multiword DMA mode 2 is currently active.
	Bit	**Word 84**
	0	SMART error login is supported.
	1	SMART self-test is supported.
	2	Media serial number is supported.
	3	Media Card Pass Through Command feature set is supported.
	4	Streaming feature set is supported.
	5	GPL feature set is supported.
	6	WRITE DMA FUA EXT and WRITE MULTIPLE FUA EXT commands are supported.
	7	WRITE DMA QUEUED FUA EXT command is supported.
	8	64-bit World Wide Name is supported.
	9-10	Obsolete.
	11-12	Reserved for TLC.
	13	IDLE IMMEDIATE command with IUNLOAD feature is supported.
	14	Shall be set to 1.
	15	Shall be cleared to 0.

	Bit	Word 88
	0	Ultra DMA mode 0 is supported.
	1	Ultra DMA mode 1 is supported.
	2	Ultra DMA mode 2 is supported.
	3	Ultra DMA mode 3 is supported.
	4	Ultra DMA mode 4 is supported.
	5	Ultra DMA mode 5 is supported.
	6	Ultra DMA mode 6 is supported.
	8	Ultra DMA mode 0 is currently active.
	9	Ultra DMA mode 1 is currently active.
	10	Ultra DMA mode 2 is currently active.
	11	Ultra DMA mode 3 is currently active.
	12	Ultra DMA mode 4 is currently active.
	13	Ultra DMA mode 5 is currently active.
	14	Ultra DMA mode 6 is currently active.

4.3.2 Set Features command

This command controls the implementation of various features that the drive supports. When the drive receives this command, it sets BSY, checks the contents of the Features register, clears BSY and generates an interrupt. If the value in the register does not represent a feature that the drive supports, the command is aborted. Power-on default has the read look-ahead and write caching features enabled. The acceptable values for the Features register are defined as follows:

Table 10: Set Features command values

- 02_H Enable write cache *(default).*
- 03_H Set transfer mode (based on value in Sector Count register).
  Sector Count register values:
  - 00_H Set PIO mode to default (PIO mode 2).
  - 01_H Set PIO mode to default and disable IORDY (PIO mode 2).
  - 08_H PIO mode 0
  - 09_H PIO mode 1
  - $0A_H$ PIO mode 2
  - $0B_H$ PIO mode 3
  - $0C_H$ PIO mode 4 *(default)*
  - 20_H Multiword DMA mode 0
  - 21_H Multiword DMA mode 1
  - 22_H Multiword DMA mode 2
  - 40_H Ultra DMA mode 0
  - 41_H Ultra DMA mode 1
  - 42_H Ultra DMA mode 2
  - 43_H Ultra DMA mode 3
  - 44_H Ultra DMA mode 4
  - 45_H Ultra DMA mode 5
  - 46_H Ultra DMA mode 6
- 10_H Enable use of SATA features
- 55_H Disable read look-ahead (read cache) feature.
- 82_H Disable write cache
- 90_H Disable use of SATA features
- AA_H Enable read look-ahead (read cache) feature *(default).*
- $F1_H$ Report full capacity available

Note. At power-on, or after a hardware or software reset, the default values of the features are as indicated above.

4.3.3 S.M.A.R.T. commands

S.M.A.R.T. provides near-term failure prediction for disk drives. When S.M.A.R.T. is enabled, the drive monitors predetermined drive attributes that are susceptible to degradation over time. If self-monitoring determines that a failure is likely, S.M.A.R.T. makes a status report available to the host. Not all failures are predictable. S.M.A.R.T. predictability is limited to the attributes the drive can monitor. For more information on S.M.A.R.T. commands and implementation, see the *Draft ATA-5 Standard.*

SeaTools diagnostic software activates a built-in drive self-test (DST S.M.A.R.T. command for $D4_H$) that eliminates unnecessary drive returns. The diagnostic software ships with all new drives and is also available at: http://seatools.seagate.com.

This drive is shipped with S.M.A.R.T. features disabled. You must have a recent BIOS or software package that supports S.M.A.R.T. to enable this feature. The table below shows the S.M.A.R.T. command codes that the drive uses.

Table 11: S.M.A.R.T. commands

Code in features register	S.M.A.R.T. command
$D0_H$	S.M.A.R.T. Read Data
$D2_H$	S.M.A.R.T. Enable/Disable Attribute Autosave
$D3_H$	S.M.A.R.T. Save Attribute Values
$D4_H$	S.M.A.R.T. Execute Off-line Immediate (runs DST)
$D5_H$	S.M.A.R.T. Read Log Sector
$D6_H$	S.M.A.R.T. Write Log Sector
$D8_H$	S.M.A.R.T. Enable Operations
$D9_H$	S.M.A.R.T. Disable Operations
DA_H	S.M.A.R.T. Return Status

Note. If an appropriate code is not written to the Features Register, the command is aborted and 0*x*04 (abort) is written to the Error register.

5.0 Seagate Technology support services

Internet
For information regarding Seagate products and services, visit www.seagate.com.

Worldwide support is available 24 hours daily by e-mail for your questions.

Presales Support:
Presales@Seagate.com

Technical Support:
DiscSupport@Seagate.com

Warranty Support:
http://www.seagate.com/www/en-us/support/warranty_&_returns_assistance

mySeagate
my.seagate.com is the industry's first Web portal designed specifically for OEMs and distributors. It provides self-service access to critical applications, personalized content and the tools that allow our partners to manage their Seagate account functions. Submit pricing requests, orders and returns through a single, password-protected Web interface-anytime, anywhere in the world.

spp.seagate.com
spp.seagate.com supports Seagate resellers with product information, program benefits and sales tools. You may register for customized communications that are not available on the web. These communications contain product launch, EOL, pricing, promotions and other channel-related information. To learn more about the benefits or to register, go to spp.seagate.com, any time, from anywhere in the world.

Global Customer Support

Presales Support
Our Presales Support staff can help you determine which Seagate products are best suited for your specific application or computer system, as well as product availability and compatibility.

Technical Support
Seagate technical support is available to assist you online at support.seagate.com or through one of our call centers. Have your system configuration information and your "ST" model/product number available.

Customer Service Operations

Warranty Service

Seagate offers worldwide customer support for Seagate products. Seagate distributors, OEMs and other direct customers should contact their Seagate Customer Service Operations (CSO) representative for warranty-related issues. Resellers or end users of drive products should contact their place of purchase or Seagate warranty service for assistance. Have your serial number and model or part number available.

Data Recovery Services

Seagate offers data recovery services for all formats and all brands of storage media. Our data recovery services labs are currently located throughout the world. Additional information, including an online request form and data loss prevention resources, is available at http://services.seagate.com/index.aspx.

Authorized Service Centers

Seagate Service Centers are available on a global basis for the return of defective products.
See www.seagate.com for the service center near you.

USA/Canada/Latin America support services

For an extensive list of telephone numbers to technical support, presales and warranty service in USA/Canada/Latin America, including business hours, go to the "Contact Us" page on www.seagate.com.

Global Customer Support

Presales, Technical, and Warranty Support

Call Center	Toll-free	Direct dial
USA, Canada, and Mexico	1-800-SEAGATE	+1-405-324-4700

Data Recovery Services

Call Center	Toll-free	Direct dial	FAX
USA, Canada, and Mexico	1-800-475-0143	+1-905-474-2162	1-800-475-0158 +1-905-474-2459

Europe, the Middle East and Africa Support Services

For an extensive list of telephone numbers to technical support, presales and warranty service in Europe, the Middle East and Africa, go to the "Contact Us" page on www.seagate.com.

Asia/Pacific Support Services

For an extensive list of telephone numbers to technical support, presales and warranty service in Asia/Pacific, go to the "Contact Us" page on www.seagate.com.

Index

A

ACA 19
acceleration 16
acoustics 17
Active 14
Active mode 14
Agency certification 18
altitude 15
Ambient temperature 15
ambient temperature 12, 13
Annualized Failure Rate 18
areal density 11
ATA commands 27
Australia/New Zealand Standard AS/NZ CISPR22 19
Australian Communication Authority (ACA) 19
Australian C-Tick 19
Average latency 12
Average seek time 12

B

buffer 11

C

cables and connectors 22
cache 11
capacity 10
case temperature 15
CE mark 18
certification 18
Check Power Mode 27
China RoHS directive 20
compatibility 18
Conducted noise 14
Conducted RF immunity 17
Configuring the drive 21
connectors 22
Corrosive environment 20
CSA60950-1 18
Cylinders 10

D

data-transfer rates 1
DC power 13
Default logical geometry 10
density 11
Device Configuration Freeze Lock 27
Device Configuration Identify 27
Device Configuration Restore 27
Device Configuration Set 27
Device Reset 27
dimensions 23, 24
dissipation 13
Download Microcode 27

E

Electrical fast transient 17
Electromagnetic compatibility 18
Electromagnetic Compatibility (EMC) 19
Electromagnetic Compatibility control Regulation 19
Electromagnetic Compatibility Directive (2004/108/EC) 18
Electromagnetic immunity 17
Electrostatic discharge 17
electrostatic discharge (ESD) 21
EN 55022, Class B 18
EN 55024 18
EN60950 18
enclosures 19
Environmental specifications 15
error-correction algorithms 1
ESD 21
EU 18
EU RoHS directive 20
European Union (EU) requirements 18
Execute Device Diagnostics 27

F

FCC verification 19
features 1
Flush Cache 27
Flush Cache Extended 27
Format Track 27
Formatted capacity 10

G

geometry 10
Gs 16
guaranteed sectors 10

H

Handling precautions 21
heads 10
height 11
humidity 15

I

I/O data-transfer rate 11
Identify Device 27
Identify Device command 29
Idle 14, 27
Idle Immediate 27
Idle mode 13, 14
Information Technology Equipment (ITE) 18

Initialize Device Parameters 27
Input noise ripple 14
input voltage 13
interface 11, 25
interference 19
internal data-transfer rate OD 11
is 12
ISO document 7779 17
ITE 18

K

KCC 19
Korean Communications Commission 19
Korean RRL 19

L

latency 12
LBA mode 10
length 11
logical geometry 10

M

master/slave 2
mounting 23
mounting screws 16
mounting the drive 21

N

noise 14
nominal power 12
Nonoperating shock 16
Nonoperating vibration 16

O

operating 13
Operating power 13
Operating shock 16
Operating vibration 16

P

Physical characteristics 11
point-to-point 2, 22
Power consumption 13
power dissipation 13
Power modes 14
Power specifications 13
Power-management modes 14
Power-on to Ready 12
precautions 21
printed circuit board 21
programmable power management 14
prominent discrete tone 17

Q

quick reference 3

R

Radiated RF immunity 17
radio and television interference 19
radio frequency (RF) 17
random seeks 13
Read Buffer 27
Read DMA 27
Read DMA Extended 27
Read DMA without Retries 27
Read Log Ext 27
Read Multiple 27
Read Multiple Extended 27
Read Native Max Address 27
Read Native Max Address Extended 27
Read Sectors 27
Read Sectors Extended 27
Read Sectors Without Retries 27
Read Verify Sectors 27
Read Verify Sectors Extended 27
Read Verify Sectors Without Retries 27
Read/write heads 10
Read/write power 13
Recalibrate 27
recording density 11
recording method 11
Recording technology 11
relative humidity 15
Reliability 18
RF 17
RMS read/write current 14
RoHS 20
RRL 19

S

S.M.A.R.T. Disable Operations 28
S.M.A.R.T. Enable Operations 28
S.M.A.R.T. Enable/Disable Autosave 28
S.M.A.R.T. Execute Offline 28
S.M.A.R.T. implementation 27
S.M.A.R.T. Read Attribute Thresholds 28
S.M.A.R.T. Read Data 28
S.M.A.R.T. Read Log Sector 28
S.M.A.R.T. Return Status 28
S.M.A.R.T. Save Attribute Values 28
S.M.A.R.T. Write Log sector 28
Safety certification 18
SATA 25
screws 16
sectors 10
Sectors per track 10
Security Disable Password 27

Security Erase Prepare 28
Security Erase Unit 28
Security Freeze 28
Security Set Password 28
Security Unlock 28
See “S.M.A.R.T. commands” on page 34 27
Seek 28
Seek time 12
Serial ATA (SATA) interface 25
serial ATA ports 2
servo electronics 13
Set Features 28
Set Max Address 28
Set Max Address Extended 28
Set Multiple Mode 28
Shock 16
single-track seeks 12
Sleep 13, 14, 28
Sleep mode 14
sound 17
Specification summary table 3
spindle speed 11
Spinup 13
Spinup power 13
Standby 13, 14, 28
Standby Immediate 28
Standby mode 13, 14
standby timer 14
Standby to Ready 12
Start/stop times 12
static-discharge 21
subassembly 19
support services 35
Surge immunity 17

T

technical support services 35
temperature 12, 15
temperature gradient 15
timer 14
timers 14
track density 11
Track-to-track 12
Track-to-track seek time 12

U

UL60950-1 18

V

Vibration 16
voltage 13
Voltage dips, interrupts 17
Voltage tolerance 14

W

weight 11
wet bulb temperature 15
width 11
Write Buffer 28
Write DMA 28
Write DMA Extended 28
Write DMA FUA Extended 28
Write DMA Without Retries 28
Write Log Extended 28
Write Multiple 28
Write Multiple Extended 28
Write Multiple FUA Extended 28
Write Sectors 28
Write Sectors Extended 28
Write Sectors Without Retries 28

Seagate Technology LLC
920 Disc Drive, Scotts Valley, California 95066-4544, USA
Publication Number: 100529369, Rev. G, Printed in U.S.A.